

Dragon X

Acquire | Store | View | Share

Portable X-Ray System

LEADER IN PORTABILITY AND POWER



- Lightweight
- Powerful 100 mA., 125 kVp
- 4 kW or 8 kW HF Generator
- LED Collimator
- Exceptional Arm Mobility
- Activate Collimator Light from 5 Locations
- Fractional Focal Spot Tube for Greater Detail
- Technique Selection at Console or at Tube



**1 Region
APR Console
MEMBRANE**



**6 Region
APR Console
TOUCHSCREEN**


Call us for an in-office demo today.
1-800-385-9593



Dragon X

Portable X-Ray System

SPECIFICATIONS		HIGH FREQUENCY X-RAY GENERATORS	
Models		SPSL-HF-4.0 / 8.0 APAL	
kW Rating		4.0 / 8.0	
kVp Range in 1 kVp Steps		40 to 125	
Accuracy		+/- 5%	
High Frequency Ripple		300 kHz	
mA Stations		5, 6.4, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80, 100	
Exposure Time Range		0.001 - 10 seconds	
Number of Stations		41 (in 25% steps)	
mAs Range		0.1 - 250 mAs	
Number of Stations		34 (in 25% steps)	
Accuracy		5%	
APR Membrane Console		1 Region	
6 Region APR Touchscreen Console		Skull, Thorax, Spine, Abdomen/Pelvis, Lower & Upper Extremities / Small, Medium, Large and Pediatric Patient Sizes	
User Friendly Multi-Language Selection		English, Spanish, French, German, Russian, Polish and Turkish	
X-Ray Tube			
Stationary Anode		0.6 mm - 1.5 mm	/ 0.6 mm - 2.8 mm
Two Focal Spots		40.000 HU	76.000 HU
Anode Heat Storage Capacity		14°	14°
Target Angle			
Laser Light Collimator		Optional	
Power Cord		19.7 ft (6 meters)	
Exposure Cord		9.8 ft (3 meters)	
Line Regulation		Single-Phase Line Automatic Regulation Automatic Output Power Adaptation to Power Line Conditions	
Line Power Requirements		110 VAC - 240 VAC / 220 VAC - 240 VAC	
+/- 10% VAC (50/60Hz)			
Weight		134.5 lbs (61 Kg)	

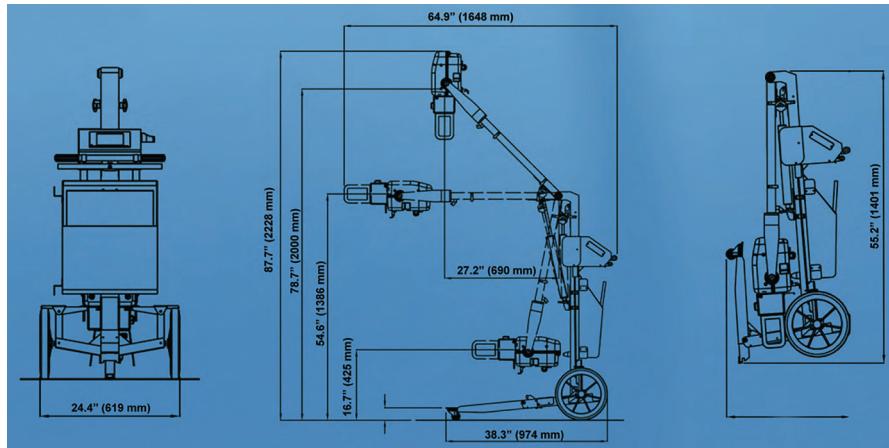

For complete product information, visit televeresystems.com